# Hack8 Barrel Hook

## Hack8 Barrel Hook

The Hack8 barrel hook is specifically designed for use in barrel sling assemblies. Manufactured from alloy steel, the Hack8 barrel hook delivers an excellent balance between toughness and ductility.

**Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.

**Product sizes:** available for chain size 7/8mm and with a working load limit of 2.0 tonnes.

**Temperature:** operational temperature range of - 40°C to + 200°C without reduction in working load limit.

**Material:** alloy steel.

**Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

**Safety factor:** 4 : 1.

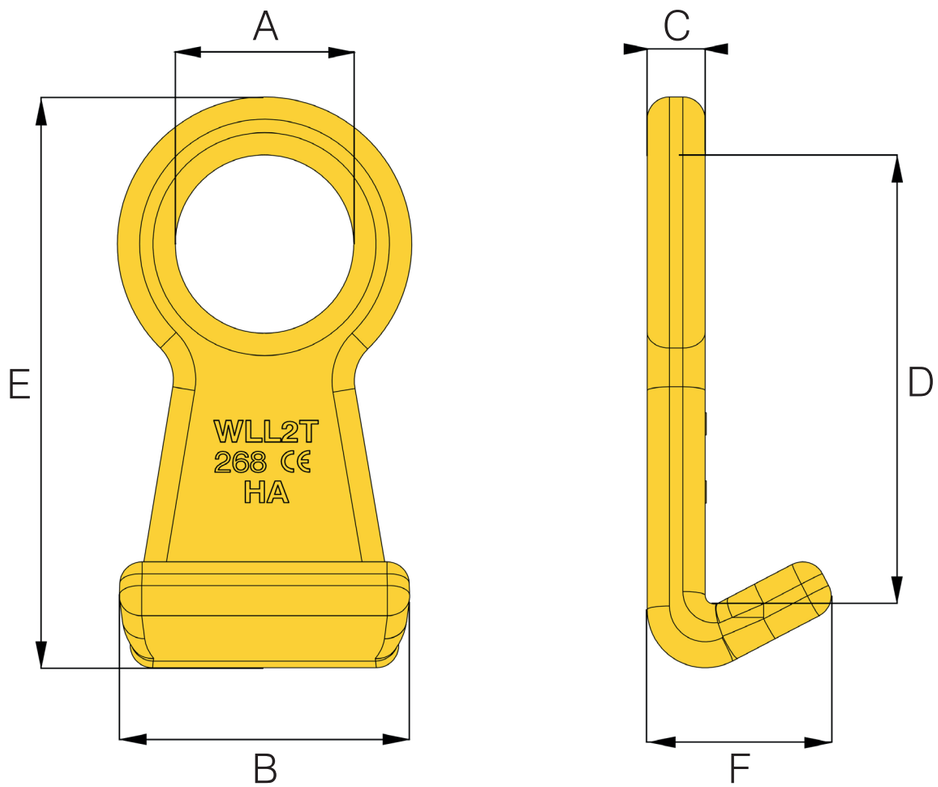


## Metric Specifications

| PART CODE | WLL tonnes | CHAIN SIZE mm | A mm | B mm | C mm | D mm | E mm | F mm | BOX QTY. | MASS kg |
|---|---|---|---|---|---|---|---|---|---|---|
| 8-H18-08 | 2.00 | 7/8 | 40.0 | 50.0 | 13.0 | 102.0 | 128.0 | 43.0 | 15 | 0.55 |



liftingsales@williamhackett.co.uk
www.williamhackett.co.uk
+44 (0)1665 604200

LEEA Full Member

# Hack8 Barrel Hook

## Hack8 Barrel Hook

The Hack8 barrel hook is specifically designed for use in barrel sling assemblies. Manufactured from alloy steel, the Hack8 barrel hook delivers an excellent balance between toughness and ductility.

**Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.

**Product sizes:** available for chain size 9/32 - 5/16 inch and with a working load limit of 4,500 lbs.

**Temperature:** operational temperature range of -40°F to +392°F (-40°C to + 200°C) without reduction in working load limit.

**Material:** alloy steel.

**Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

**Safety factor:** 4 : 1.

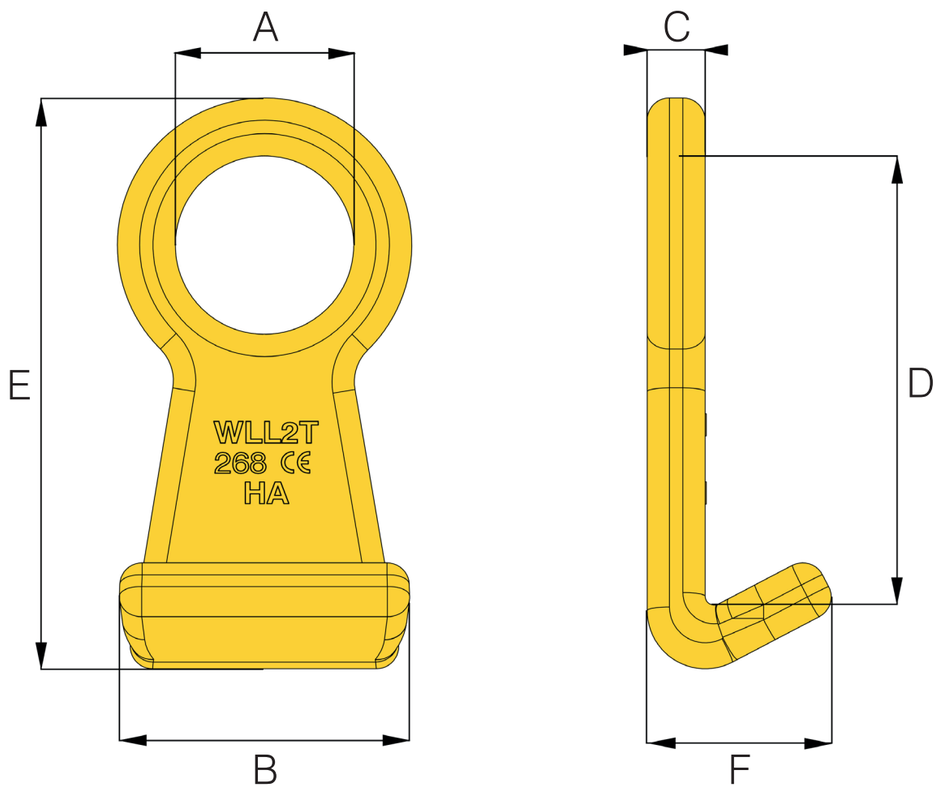


## Imperial Specifications

| PART CODE | WLL lbs | CHAIN SIZE inch | A inch | B inch | C inch | D inch | E inch | F inch | BOX QTY. | MASS lbs |
|---|---|---|---|---|---|---|---|---|---|---|
| 8-H18-08 | 4500 | 9/32 - 5/16 | 1.57 | 1.97 | 0.51 | 4.02 | 5.04 | 1.69 | 15 | 1.21 |



liftingsales@williamhackett.co.uk
www.williamhackett.co.uk
+44 (0)1665 604200

LEEA Full Member