


Hack10 Clevis Skip Hook

The Hack10 clevis skip hook is specifically designed for lifting waste skips and recycling bins as part of a Hackett chain sling assembly. The skip hook features a spring loaded gate that click fastens securely to a skip’s trunnions. Manufactured from alloy steel, the Hack10 clevis skip hook is 25% stronger than a grade 8 equivalent, delivering a greater working load limit without the need for a larger diameter chain sling.

- Standards:** designed and manufactured in accordance with EN1677-1, ASTM A952/A952M, and DIN PAS 1061 and suitable for use in chain slings certified to EN818-4.
- Product sizes:** available for chain size 13mm and with a working load limit of 6.7 tonnes
- Temperature:** operational temperature range of - 40°C to + 200°C without reduction in working load limit.
- Material:** alloy steel.
- Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

Safety factor: 4 : 1.

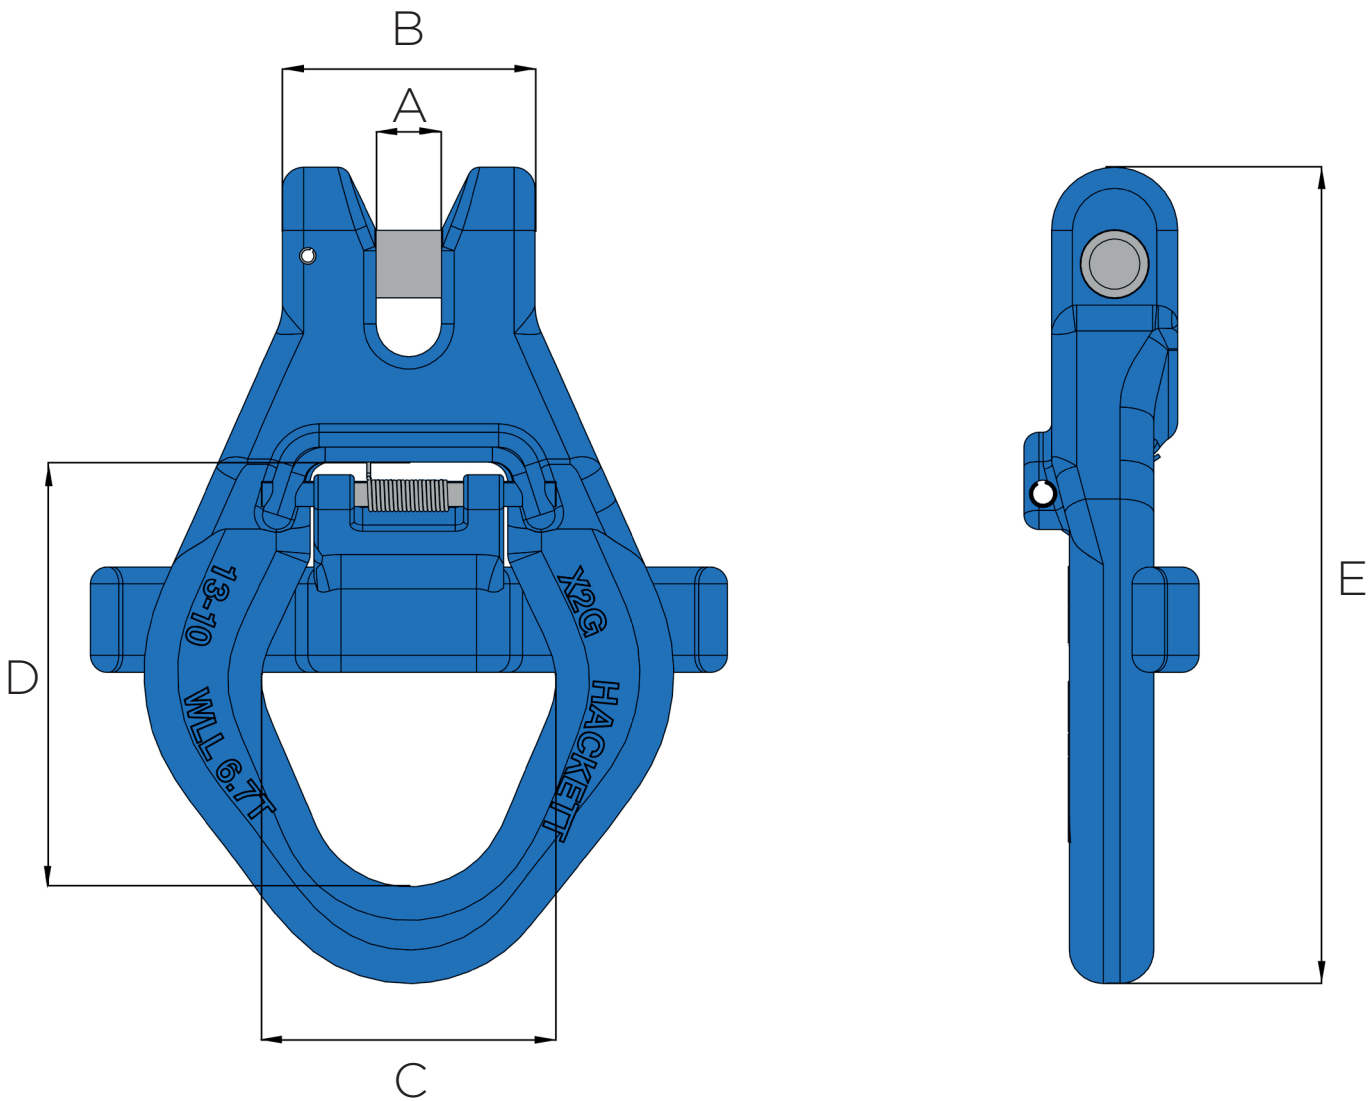


Metric Specifications

PART CODE	WLL tonnes	CHAIN SIZE mm	A mm	B mm	C mm	D mm	E mm	BOX QTY.	MASS kg
10-H16-13	6.7	13	15.0	59.3	70.0	104.0	194.0	8	1.90

Hack10 Clevis Skip Hook

The Hack10 clevis skip hook is specifically designed for lifting waste skips and recycling bins as part of a Hackett chain sling assembly. The skip hook features a spring loaded gate that click fastens securely to a skip's trunnions. Manufactured from alloy steel, the Hack10 clevis skip hook is 25% stronger than a grade 8 equivalent, delivering a greater working load limit without the need for a larger diameter chain sling.

- Standards:** designed and manufactured in accordance with EN1677-1, ASTM A952/A952M, and DIN PAS 1061 and suitable for use in chain slings certified to EN818-4.
- Product sizes:** available for chain size 1/2 inch and with a working load limit of 13,400 lbs.
- Temperature:** operational temperature range of - 40°C to + 200°C without reduction in working load limit.
- Material:** alloy steel.
- Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.
- Safety factor:** 4 : 1.

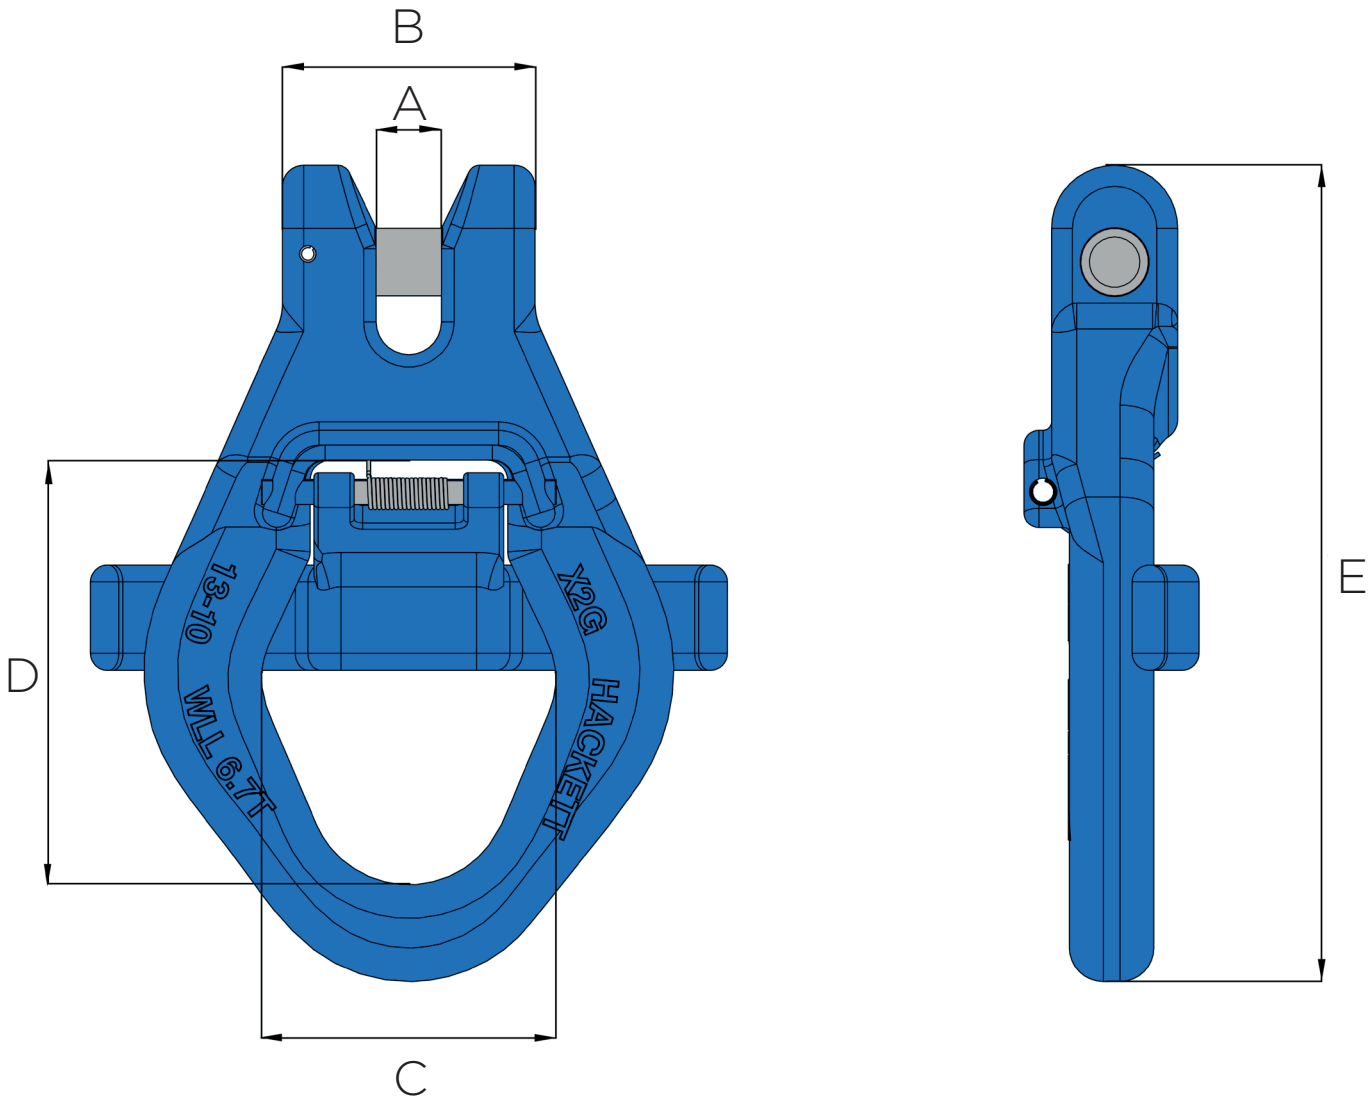

Imperial Specifications

PART CODE	WLL lbs	CHAIN SIZE inch	A inch	B inch	C inch	D inch	E inch	BOX QTY.	MASS lbs
10-H16-13	13400	1/2	0.59	2.33	2.75	4.09	7.63	8	4.18